


Specification

Material: both sides profiled high density polyethylene (UHMW)
Dimensions: 300 x 200 x 4,7cm
Mass: 235 kg / panel
Color: black
Bearing cap.: ca. 160t/m²
Transport: 100 panels of L-mat per 24T truck

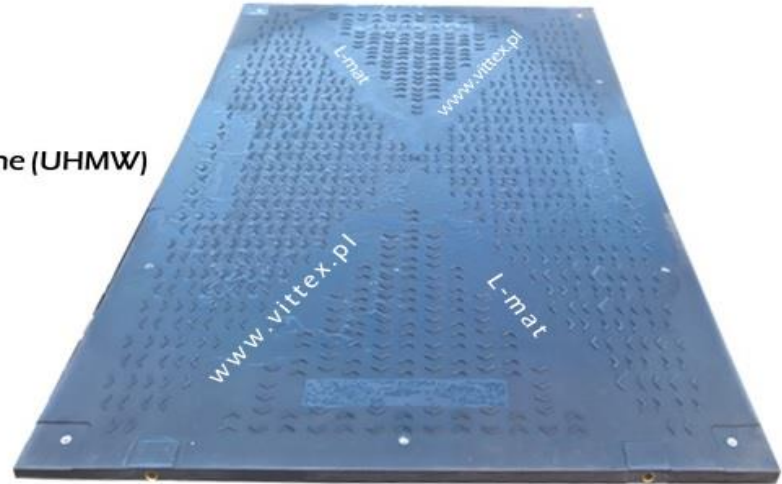

Applications

Our L-mats can be applied where the optimal load distribution is required. They can be used to make temporary road, roadway matting or site access. In most cases there is no need to prepare the ground before. They can also protect sensitive surfaces made from stones and similar or sports areas like tartan running tracks. They meet demanding conditions in many areas within gas&oil, wind energy, ground work or leisure event industries.

Our mats have two different profiles to improve traction



treading firmly even on the mud